



TOP VIEW - BACKSTOPS

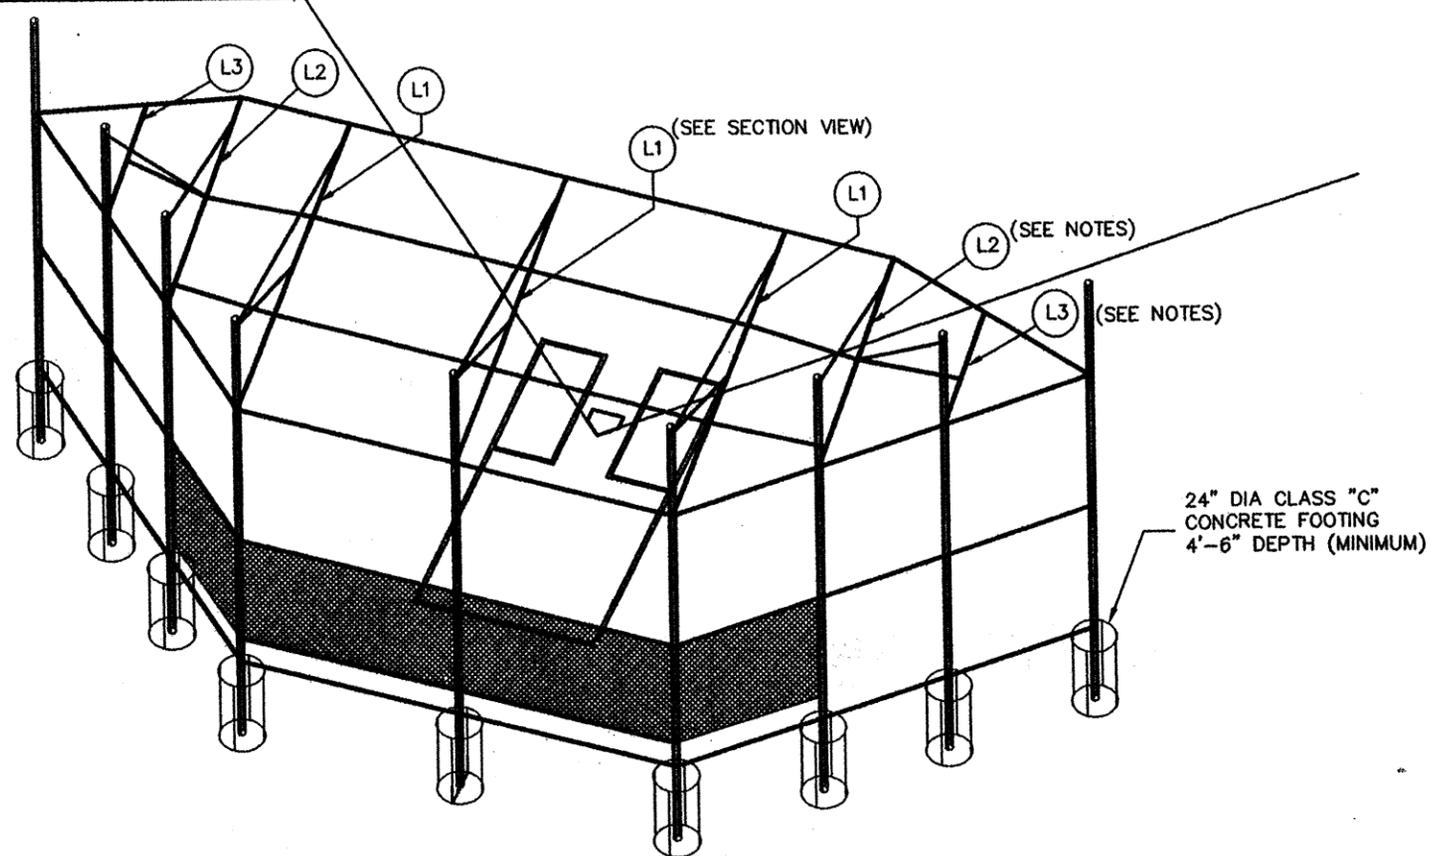


ISOMETRIC VIEW - BACKSTOPS

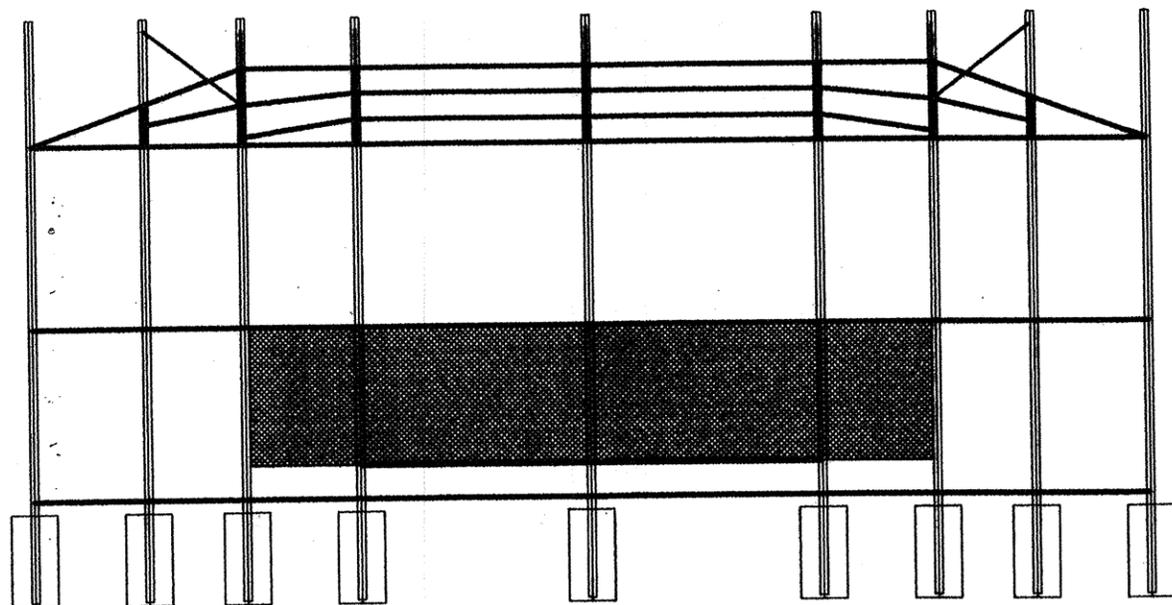

ATTACH 6' HIGH BACKSTOP SCREENING
(SEE NOTE #7)

FRONT VIEW - BACKSTOPS

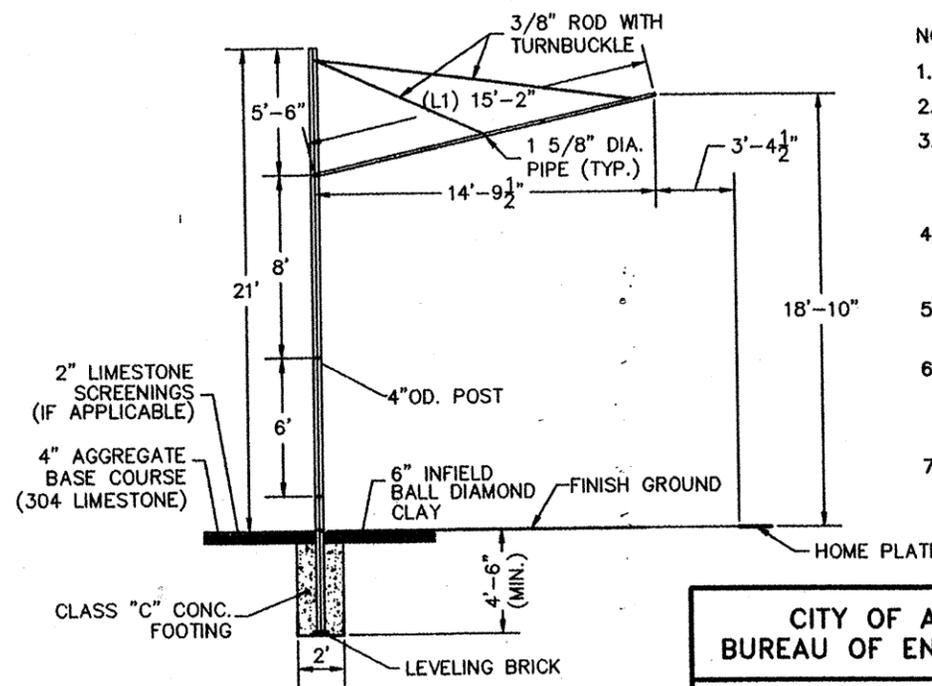

SECTION - BACKSTOPS

NOTES:

1. MAIN SUPPORT POSTS TO BE 4" O.D. GALVANIZED PIPE.
2. ALL INTERNAL SUPPORT MEMBERS TO BE 1-5/8" O.D. GALV. PIPE.
3. CANOPY SUPPORT MEMBER LENGTHS:
L1 = 15'-2" ±
L2 = 10'-4 1/2" ±
L3 = 5'-7" ±
4. FOOTING SIZE AND DEPTHS SHOWN ARE MINIMUM. THEY ARE TO BE ADJUSTED AS SITE SOIL CONDITIONS REQUIRE. FOOTING DETAILS TO BE SHOWN ON CONSTRUCTION PLANS.
5. BACKSTOP FENCING TO MEET THE GENERAL REQUIREMENTS OF ITEM 607 - FENCE.
6. THE BACKSTOP FABRICS SHALL BE AS FOLLOWS:
BACKS - 6 GAUGE X 2" MESH
SIDES - 9 GAUGE X 2" MESH
TOPS - 9 GAUGE X 2" MESH
7. ATTACH 6' HIGH OPEN MESH SCREENING TO INSIDE OF BACKSTOP. FASTENERS TO BE INJURY SAFE WITH NO JAGGED EDGES. SCREENING TO BE 'BSN SPORTS' CATALOG # BSN-MT6LPXXX. FOR INFORMATION CALL: 1-800-527-7510.

DO NOT SCALE - USE DIMENSIONS ONLY

<p>CITY OF AKRON BUREAU OF ENGINEERING</p>	<p>CONSTRUCTION STANDARD DWG. No. LA-10.1</p>
<p><i>David Ulik</i> 9-14-99 MANAGER, DESIGN DIVISION <i>Pawan K. Khaitan</i> 9-28-99 MANAGER, CONSTRUCTION DIVISION <i>G. David Hough</i> 1/28/00 9-30-99 CITY ENGINEER</p>	<p>HIGH SCHOOL STANDARD BACKSTOP</p> <p>AUTOCAD DRAWING - STD LA-10.1.DWG REVISIONS: Sept. 15, 1999</p>