
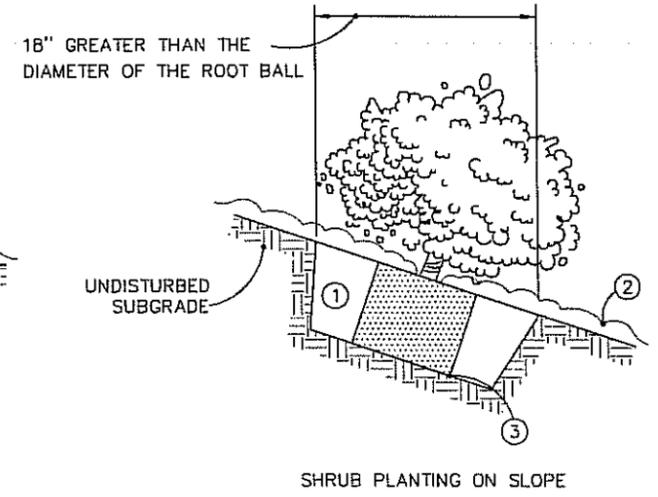


- ① BACKFILL LAWNSTRIPS & BED PLANTINGS: SOIL EXCAVATED FROM TREE HOLE WITH 20% SOIL MAGIC (AKRON MUNICIPAL COMPOST) OR APPROVED TOPSOIL PER 653.02.
- ⑫ FORMED SOIL SAUCER, 2" HIGH
- ⑬ MULCHING MATERIAL, 3" THICK, AS PER 661.07. DO NOT PLACE MULCH IN CONTACT WITH TREE TRUNK
- ⑭ BRACING STAKE, WHEN REQUIRED, AS PER 663.05
- ⑮ WRAPPING AND TYING, AS PER 663.05
- ⑱ TREE MUST BE PLANTED SUCH THAT THE TRUNK FLARE IS VISIBLE AT THE TOP OF THE ROOT BALL.
- ⑲ REMOVE ALL TWINE, ROPE AND WIRE, AND BURLAP FROM TOP HALF OF THE ROOT BALL. CUT THE WIRE BASKET IN FOUR PLACES AND FOLD DOWN 8" INTO PLANTING HOLE.
- ⑳ STAKE IS ALWAYS OPPOSITE THE PREVAILING WIND

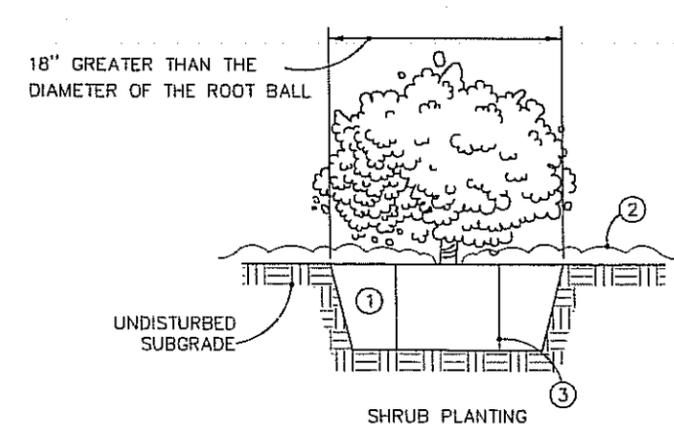

- ① BACKFILL LAWNSTRIPS & BED PLANTINGS: SOIL EXCAVATED FROM TREE HOLE WITH 20% SOIL MAGIC (AKRON MUNICIPAL COMPOST) OR APPROVED TOPSOIL PER 653.02.
- ② MULCHING MATERIAL, 3" THICK, AS PER 661.07. DO NOT PLACE MULCH IN CONTACT WITH SHRUB'S ROOT CROWN.
- ③ SEVER ALL GIRDLING ROOTS.

DO NOT SCALE - USE DIMENSIONS ONLY

CITY OF AKRON BUREAU OF ENGINEERING	CONSTRUCTION STANDARD DWG. No. LA-2B
<i>Michael Madonia</i> 3/28/07 MANAGER, DESIGN DIVISION	TREE PLANTING ON SLOPES
<i>James P. Hill</i> 3-30-07 MANAGER, CONSTRUCTION DIVISION	SHRUB PLANTING
<i>Daniel J. Kelly</i> 4/2/07 CITY ENGINEER	AUTOCAD DRAWING - STD_LA-2.DWG REVISIONS: MARCH 27, 2007

April 28, 1998